

# DOMINOSPC THE MOST DURABLE VINYL FLOOR

688

DOMINO SPC

# GRAR( DOMINO SPC THE MOST DURABLE VINYL FLOOR

#### A new perspective will be opened in the area of vinyl floorcoverings, Graboplast's new SPC floor is the best choice for your home!

The big advantage of Grabo Domino SPC flooring is its rigid core, which due to its composition (Stone Polymer Composite) is much more durable and stable than traditional click floorings. Provides perfect visual experience in appearance and due to its water resistance it can be used in any room of your home. Made from environmentally friendly ingredients, the installation of Grabo Domino SPC is extremely simple thanks to the back foaming and click form.



#### VERY SIMPLE RENOVATION

Renovation has never been easier, almost anyone can lay Grabo Domino SPC click flooring and thanks to the foam backing of the product does not require a perfect subfloor. It can also be installed on old coverings.

### IDEAL FOR KIDS AND PETS

Don't worry about damages, your floor will resist even the effects caused by children and pets.

### 100% WATERPROOF

EXCELLENT

No problem with water spills or frequent mopping, can be used in any room of the apartment without any trouble.

DIMENSIONAL STABILITY

Resistant to cold and heat, humidity changes are not a problem either.

#### ENVIRONMENTALLY FRIENDLY

The product is made from renewable raw materials and 100% recyclable, therefore, using it results in a lower carbon footprint.



### LOW RESIDUAL **INDENTATION**


Even after a long time, no impact of heavy furnitures can be seen.










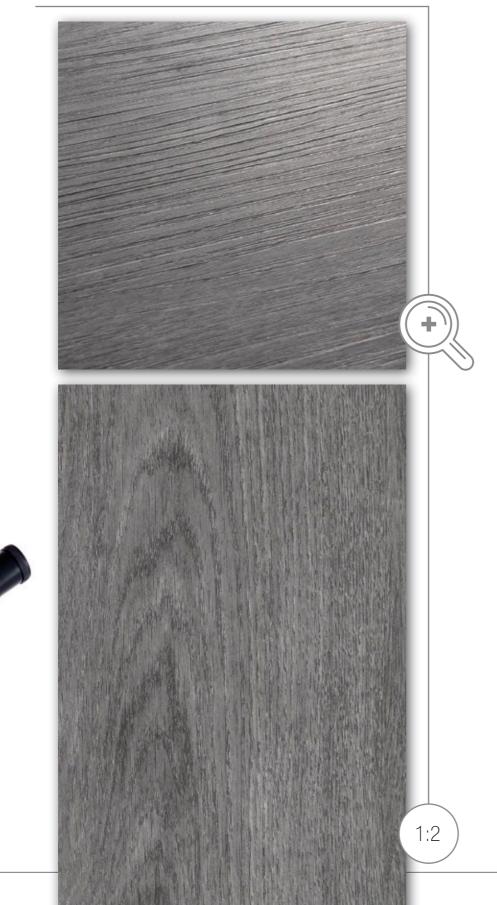









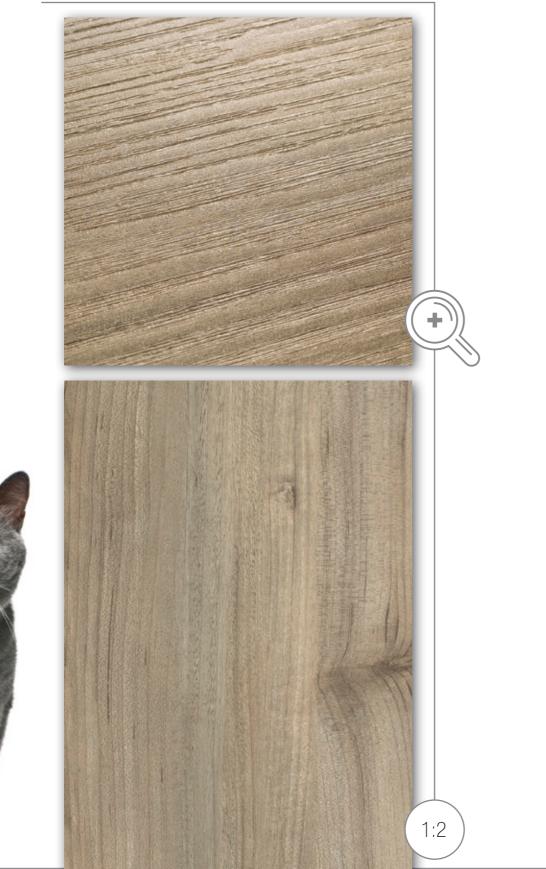

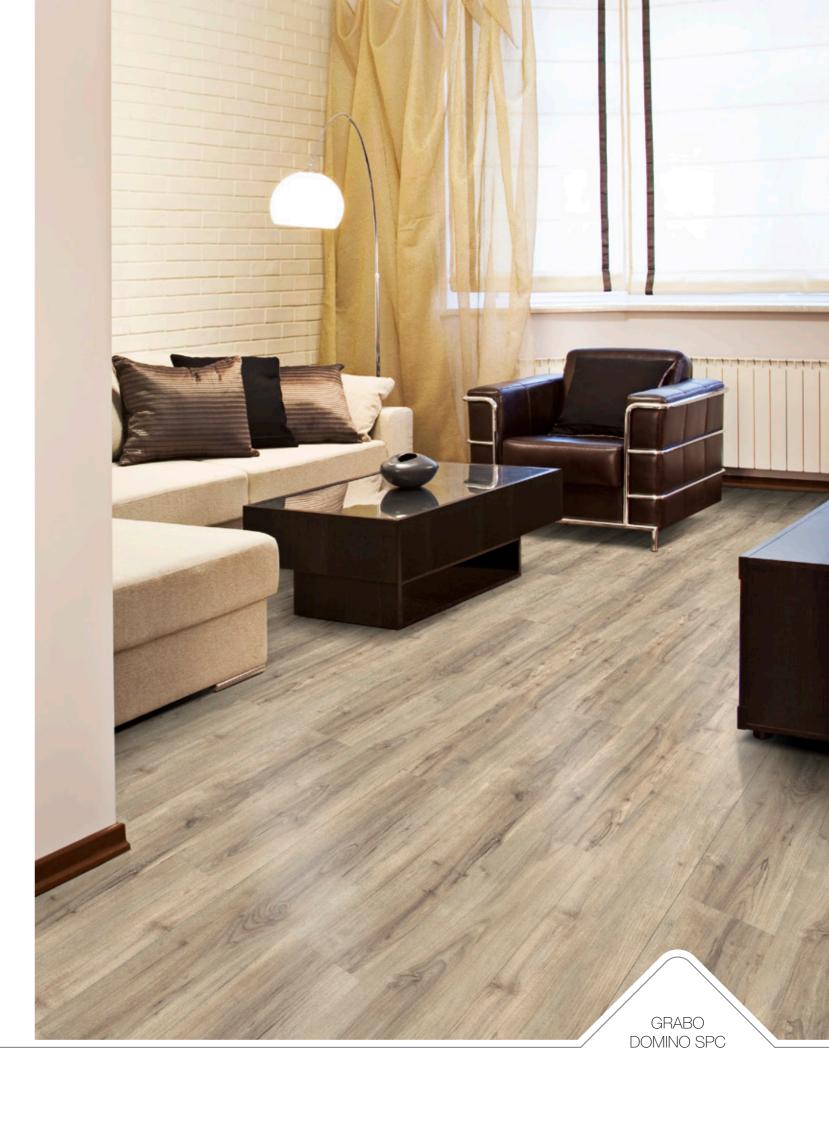






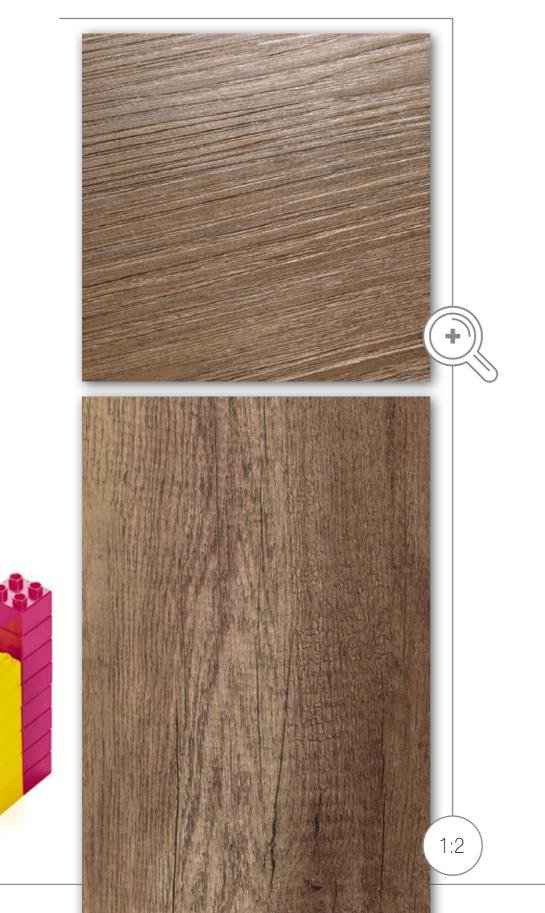









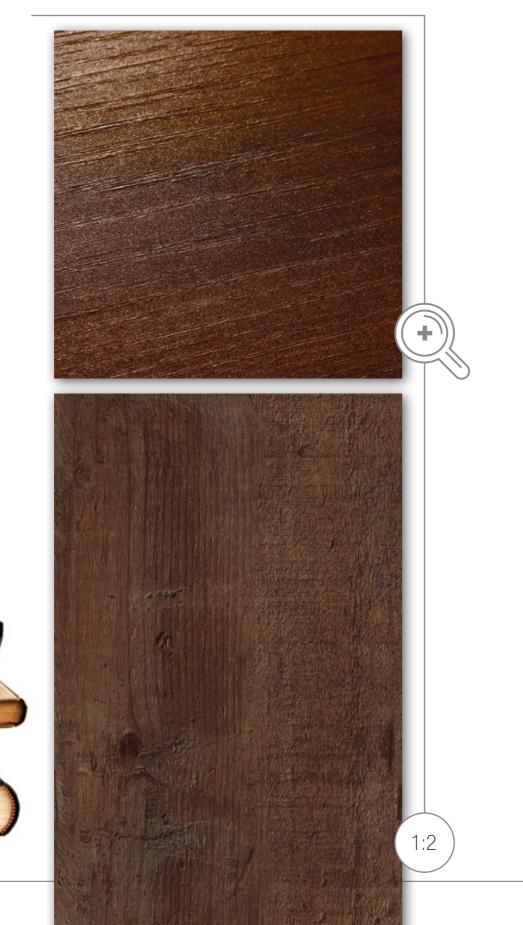

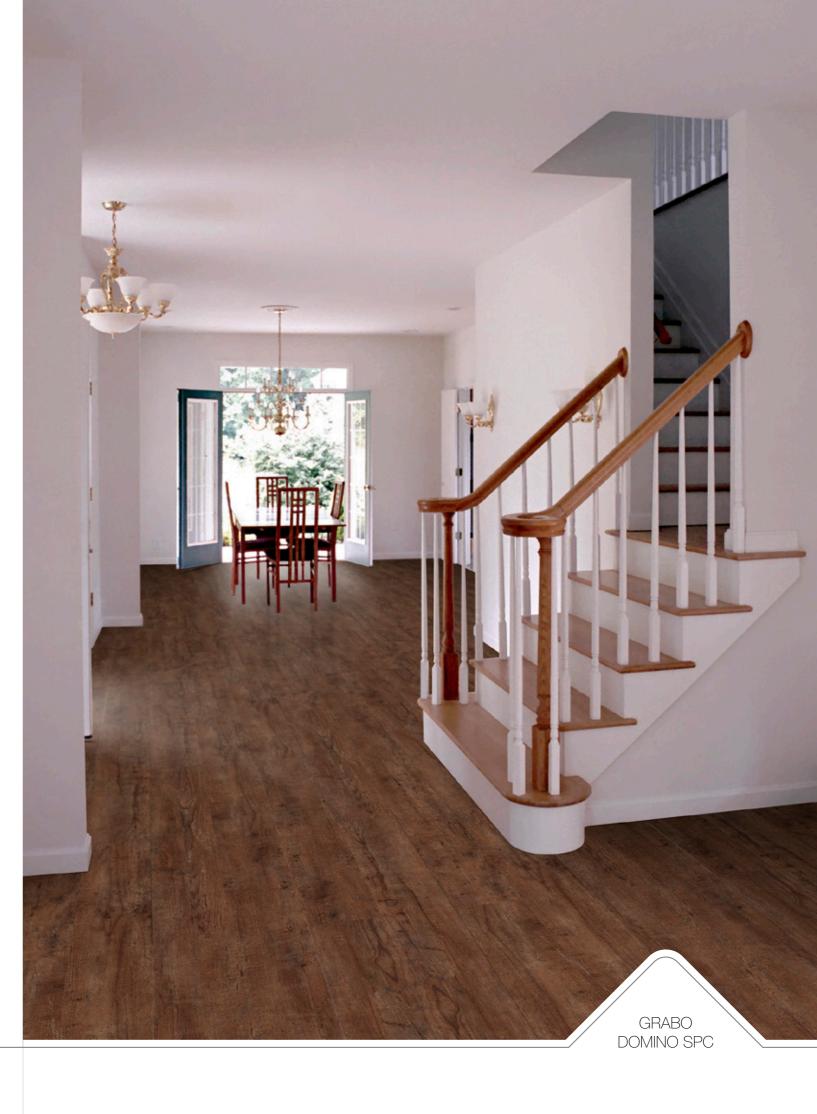






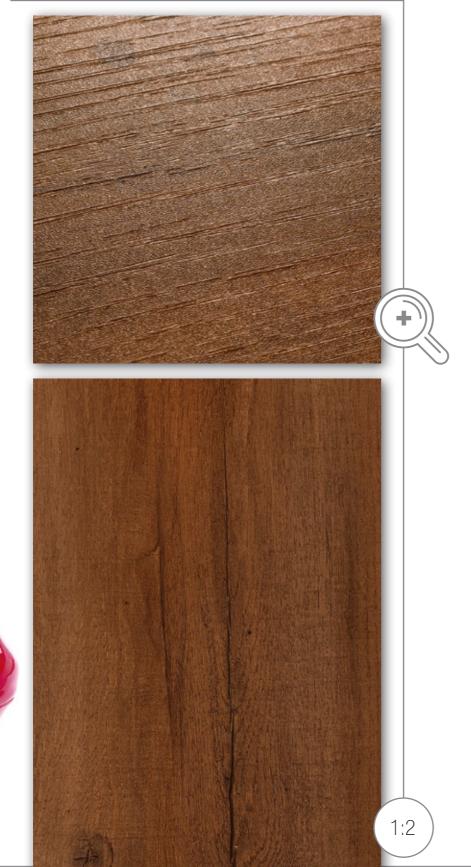







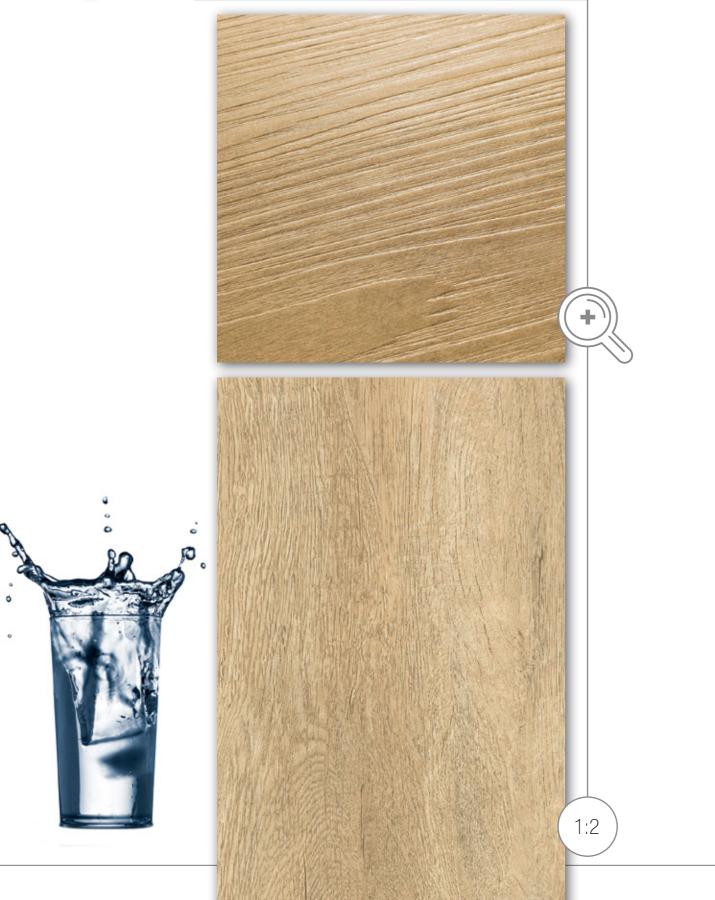












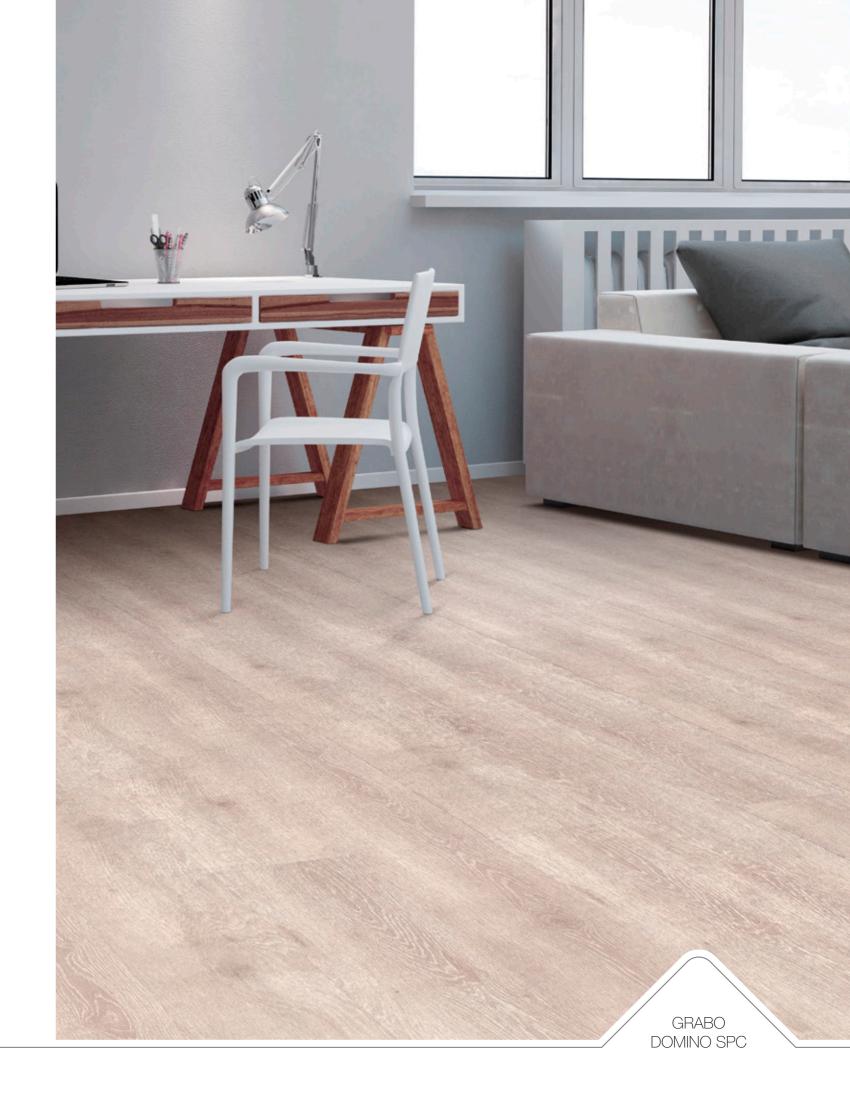






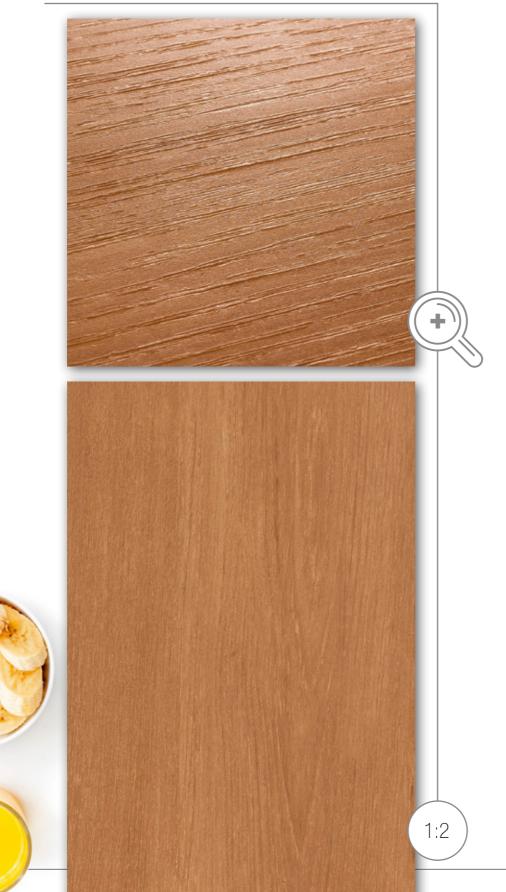


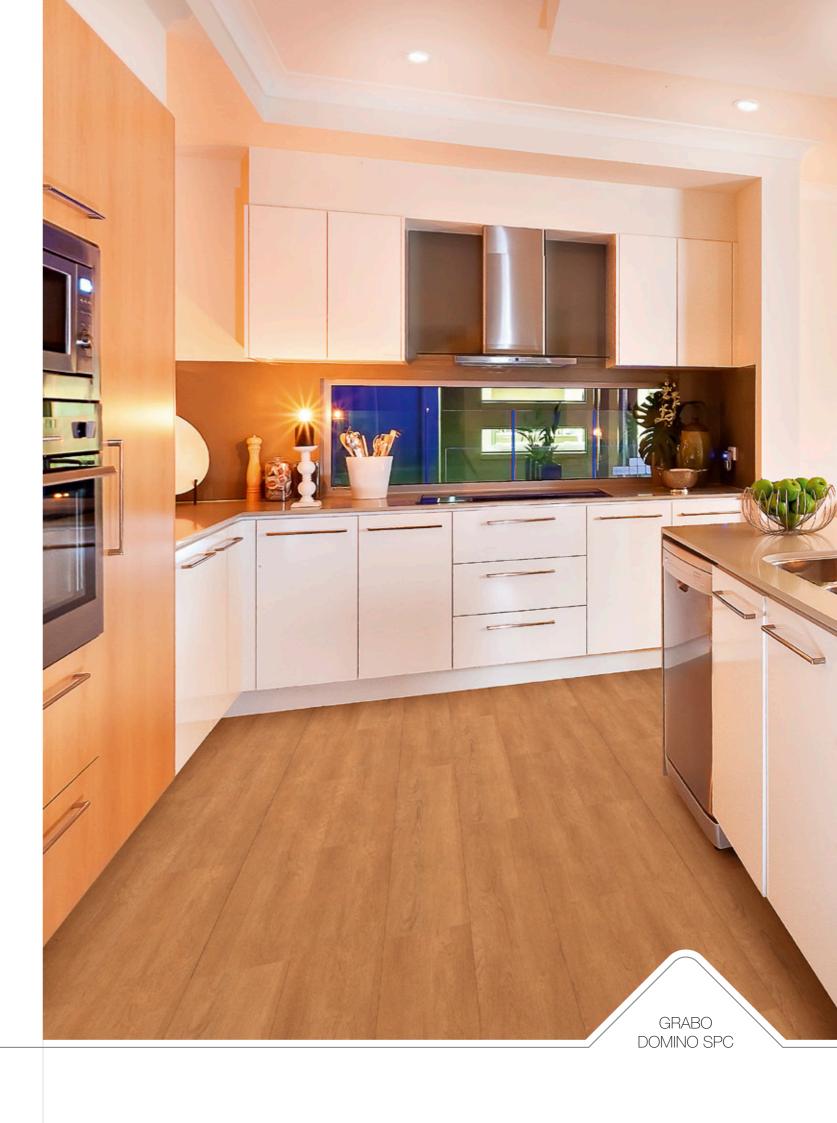






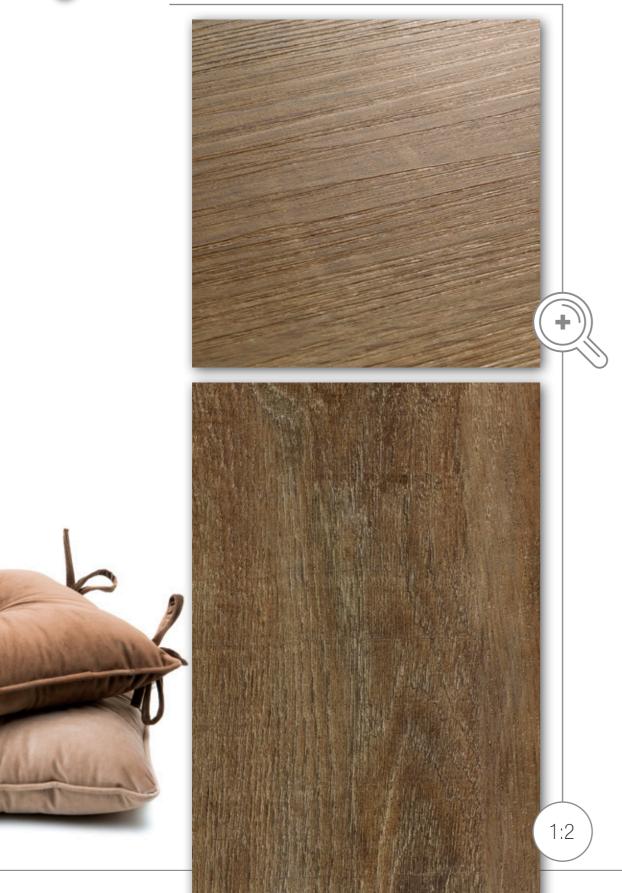

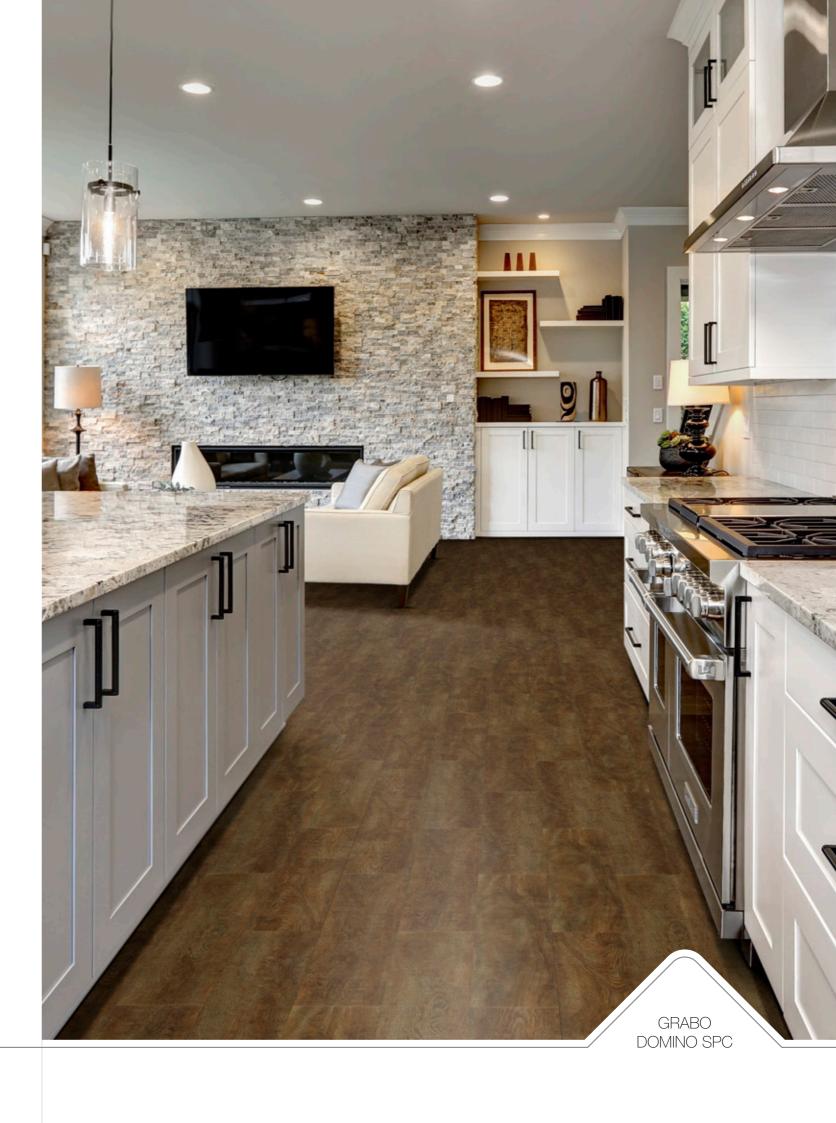






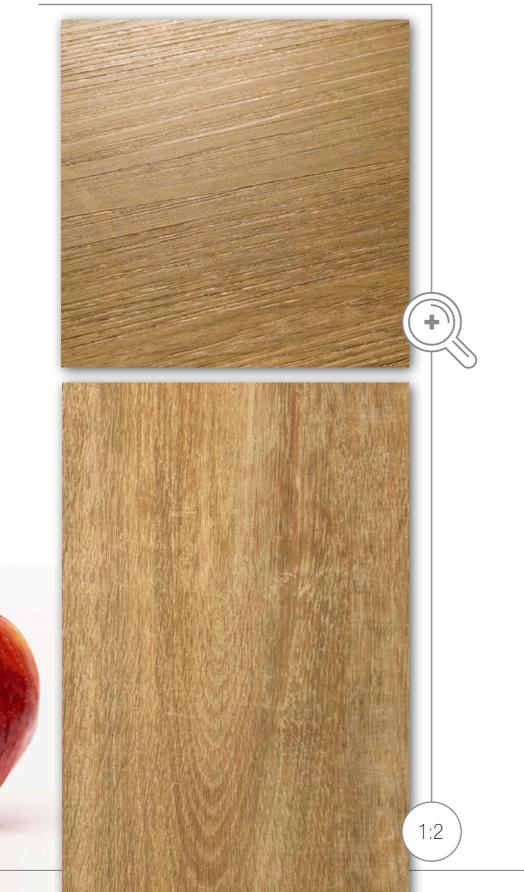







# DOMINO SPC TORMUND

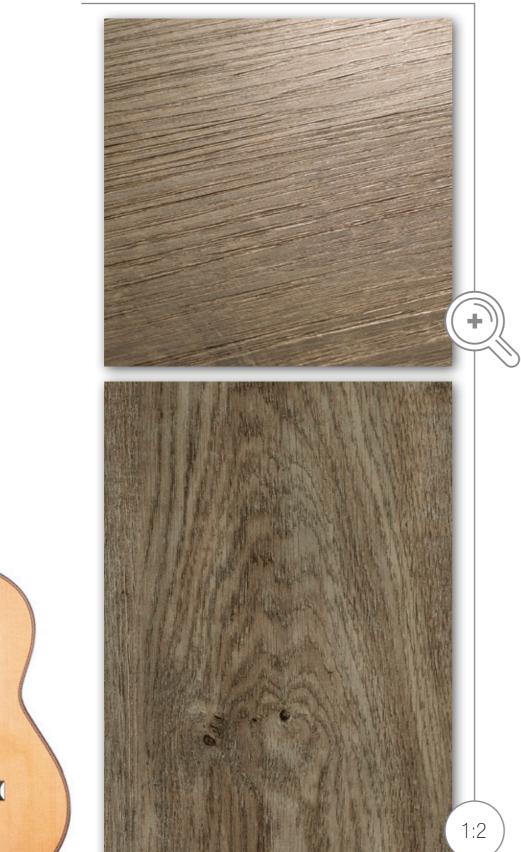

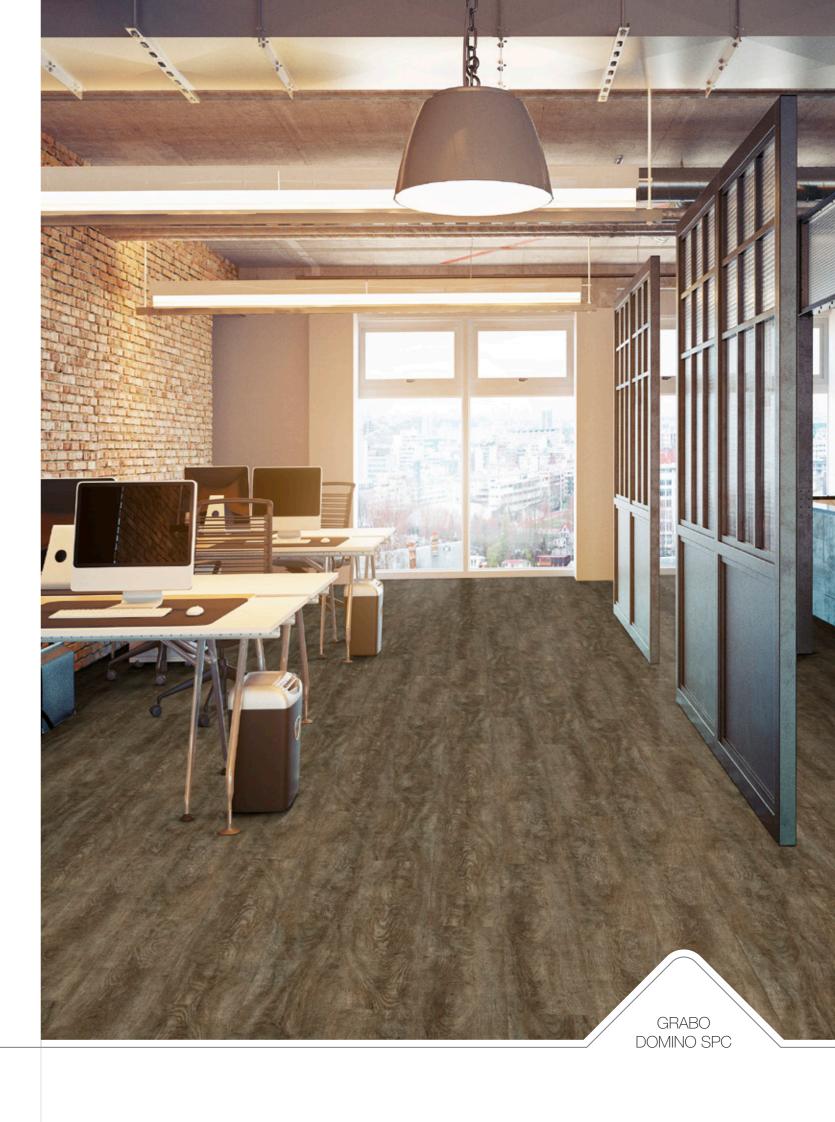





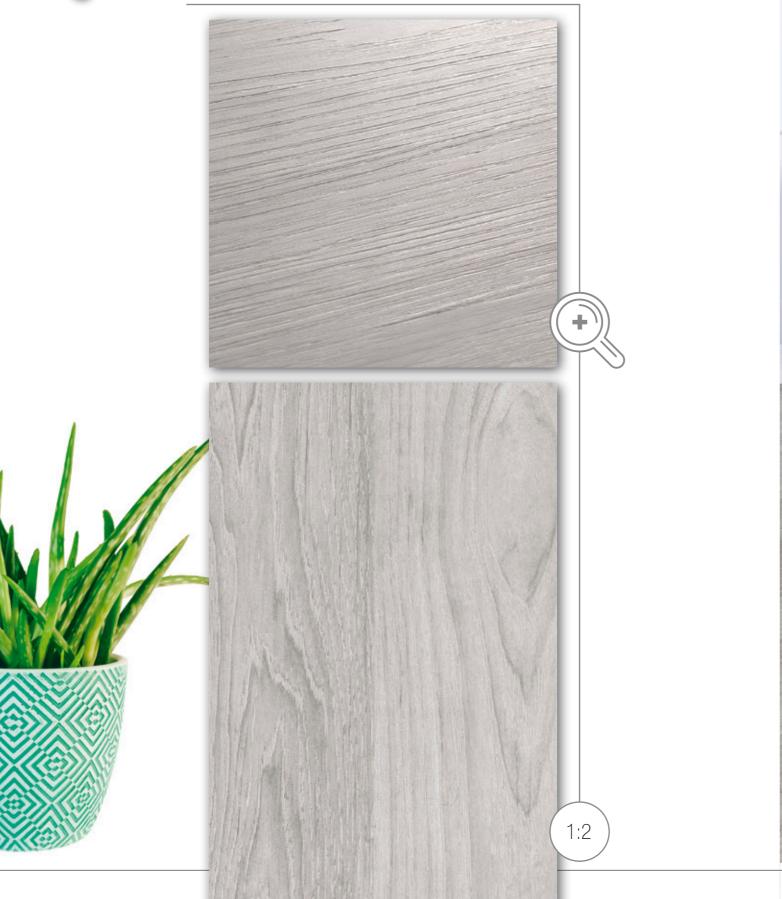



## GRABO DOMINO SPC

#### SPECIFICATION

| CONSTRUCTION                        | SPC Luxury floor with click |                       |
|-------------------------------------|-----------------------------|-----------------------|
| PLANK SIZE                          | EN ISO 24341                | 177,8×1219,2 mm       |
|                                     | EN ISO 24341                | 7×48 inch             |
| THICKNESS                           | EN ISO 24346                | 5.0 mm                |
| WEAR LAYER                          | EN ISO 24340                | 0.3 mm                |
| TOTAL WEIGHT                        | EN ISO 23997                | 7.9 kg/m <sup>2</sup> |
| CLASSIFICATION                      |                             |                       |
| EUROPEAN CLASSIFICATION             | EN ISO 10582                | class: 23/31          |
| RESIDUAL INDENTATION REQUIREMENT    | EN ISO 24343                | max. 0.1 mm           |
| RESIDUAL INDENTATION MEASURED VALUE | EN ISO 24343                | max. 0.03 mm          |
| DIMENSIONAL STABILITY               | EN ISO 23999                | max. 0.15 %           |
| CURLING                             | EN ISO 23999                | max. 2 mm             |
| PERFORMANCE                         |                             |                       |
| ABRASION GROUP                      | MSZ EN 660-1                | class: T              |
| FIRE RESISTANCE                     | EN 13501-1                  | class: Bfl-s1         |
| SLIP RESISTANCE                     | EN 13893                    | DS                    |
|                                     | DIN 51130                   | R10                   |
| IMPACT SOUND REDUCTION              | EN ISO 717-2                | 22 dB                 |
| LIGHT FASTNESS                      | EN ISO 105-B0               | grade 6               |
| CHEMICAL RESISTANCE                 | EN ISO 26987                | ✓                     |
| HYGENIE                             | ✓                           |                       |
| ENVIRONMENTAL ATTRIBUTES            | solvent and phthalate free  |                       |
| SURFACE TREATMENT                   | iGuard PUR Surface          |                       |
| CONTENT OF PCP                      | EN 12673                    | does not contain      |
| FORMALDEHIDE EMISSION               | ENV 717-1                   | E1 (no emission)      |
| VOC                                 | ISO 16000                   | <ul> <li>✓</li> </ul> |







FLOOR COVERING MANUFACTURERS LTD. H-9023 Győr, Fehérvári út. 16/b. Phone: (+36) 96 506-100

www.graboplast.com

www.facebook.com/graboplast



Attiti 31 23

Thickness

5.0 mm Wear layer <u>0.3 m</u>m

2

pcs/box



WATER RESISTANT





