

HETEROGENEOUS

GRABO Grabosafe 20 JSK

HIGH PERFORMANCE SAFETY FLOOR COVERING

PERFORMANCE, FEATURES & BENEFITS

Excellent slip resistance | Excellent durability | Dimensionally stable Ant-bacterial | 10 year warranty


CONSTRUCTION

CLP wear layer

PVC Layer

Glass fibre reinforcement

Flexyback® non-woven backing

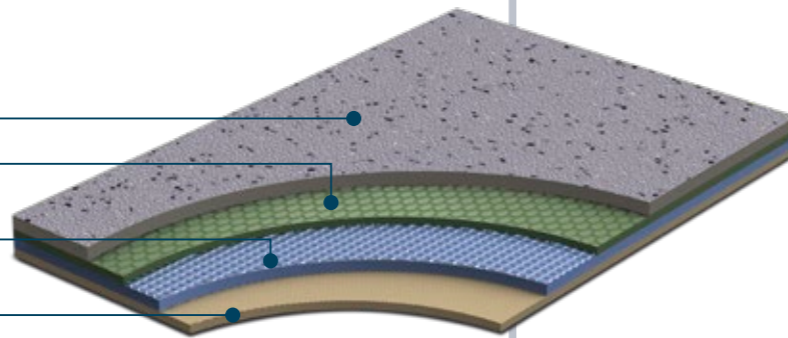

RECOMMENDED USAGE

- > Wet areas
- > Ramps
- > Food prep areas
- > Anywhere safety floor is needed

2.0
mm

TOTAL THICKNESS

2.6
kg/m²

TOTAL WEIGHT

2
m

WIDTH OF ROLLS

34 43

EUROPEAN CLASSIFICATION

SPECIFICATIONS

DESCRIPTION


Construction	compact heterogeneous	
Total thickness	EN ISO 24346	2,0 mm
Wear layer thickness	EN ISO 24340	0,9 mm
Width of roll	EN ISO 24341	2 m
Length of roll	EN ISO 24341	20 lm
Total weight	EN ISO 23997	2,6 kg/m ²

CLASSIFICATION


European classification	EN 685	class: 34/43
-------------------------	--------	--------------

PERFORMANCE


Abrasion group	EN 660-1	T
Residual indentation	EN ISO 24343	max. 0,1 mm
Dimensional stability	EN ISO 23999	max. 0,2 %
Fire resistance	EN 13501-1	class: Bfl-s1
	BS 476	class: 1
	DIN 4102/ÖNORM	class: B1
Slip resistance	Gost 30402-94	class: G1
	DIN 51130	R10
	DIN 51097	C
Abrasion resistance	EN 13893	class: DS
	ISO 9352	-0,25 g/1000 circle
Shore A hardness	ISO 868	90
Chemical resistance	EN ISO 26987	✓
Bacterial resistance	EN ISO846:1999	✓
Light fastness	EN 20105 B02	grade 6
Castor chair resistance	EN ISO 4918	✓
Surface treatment	CLP	
Anti bacterial and fungicid treatment	graboSAN	
Seaming method	hot or cold welding	
Warranty	10 year	

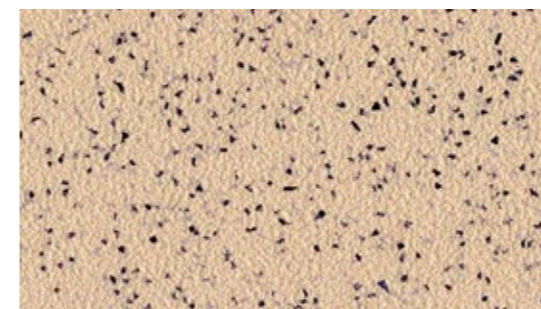


2251-03

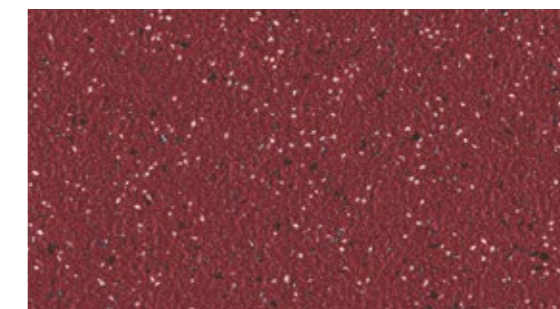

5161-03

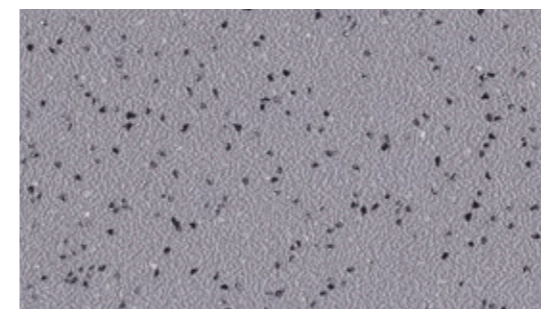


1260-03

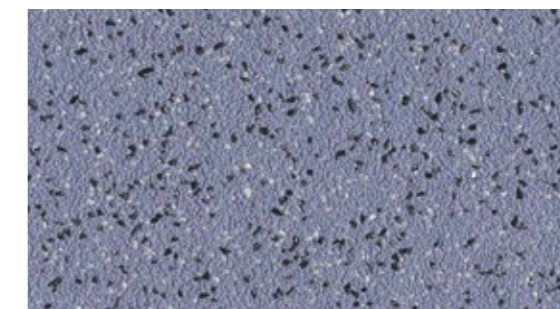

6343-03



6091-03

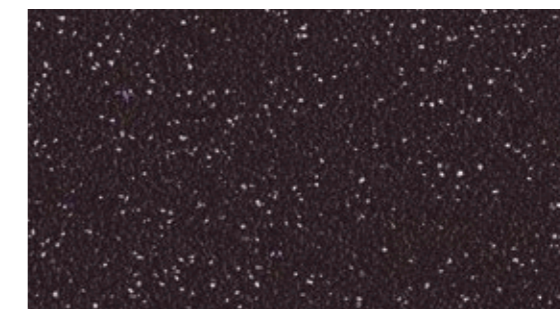

1991-03



GRABOSAFE 20 JSK