

RIGID CORE

GLUEDOWN



31: Commercial moderate



23: Domestic heavy



2,0mm | 4,5mm

Rubens

0,3 collection





Lime Washed Oak KP99-7 | SCB-KP99



Lime Washed Oak KP99-7 | SCB-KP99



Versilay InstaShield
Acoustic underlay for fast, easy installation.
No adhesive needed.

Why gluedown?



Endless design possibilities



No expansion gap required



Acoustic qualities
(up to 15dB, with Versilay InstaShield)

Why rigid core?



Quick to install



Adhesive free



Acoustic qualities
(19dB)



No underlay required



Hides subfloor imperfections




Install over a damp subfloor







Mid Limed Oak SCB-KP96

 **Rigid core:** 1220,0mm x 180,0mm




White Painted Oak
SCB-KP105 




Washed Scandi Pine
SCB-KP132 




Mid Limed Oak
SCB-KP96 



Grey Limed Oak KP138-7 | SCB-KP138

 **Gluedown:** 1219,2mm x 177,8mm

 **Rigid core:** 1220,0mm x 180,0mm



Grey Limed Oak
KP138-7  
SCB-KP138 



Lime Washed Oak
KP99-7  
SCB-KP99 




Classic Limed Oak
KP97-7  
SCB-KP97 



Rose Washed Oak
KP95-7  
SCB-KP95 



Pale Limed Oak
KP94-7  
SCB-KP94 

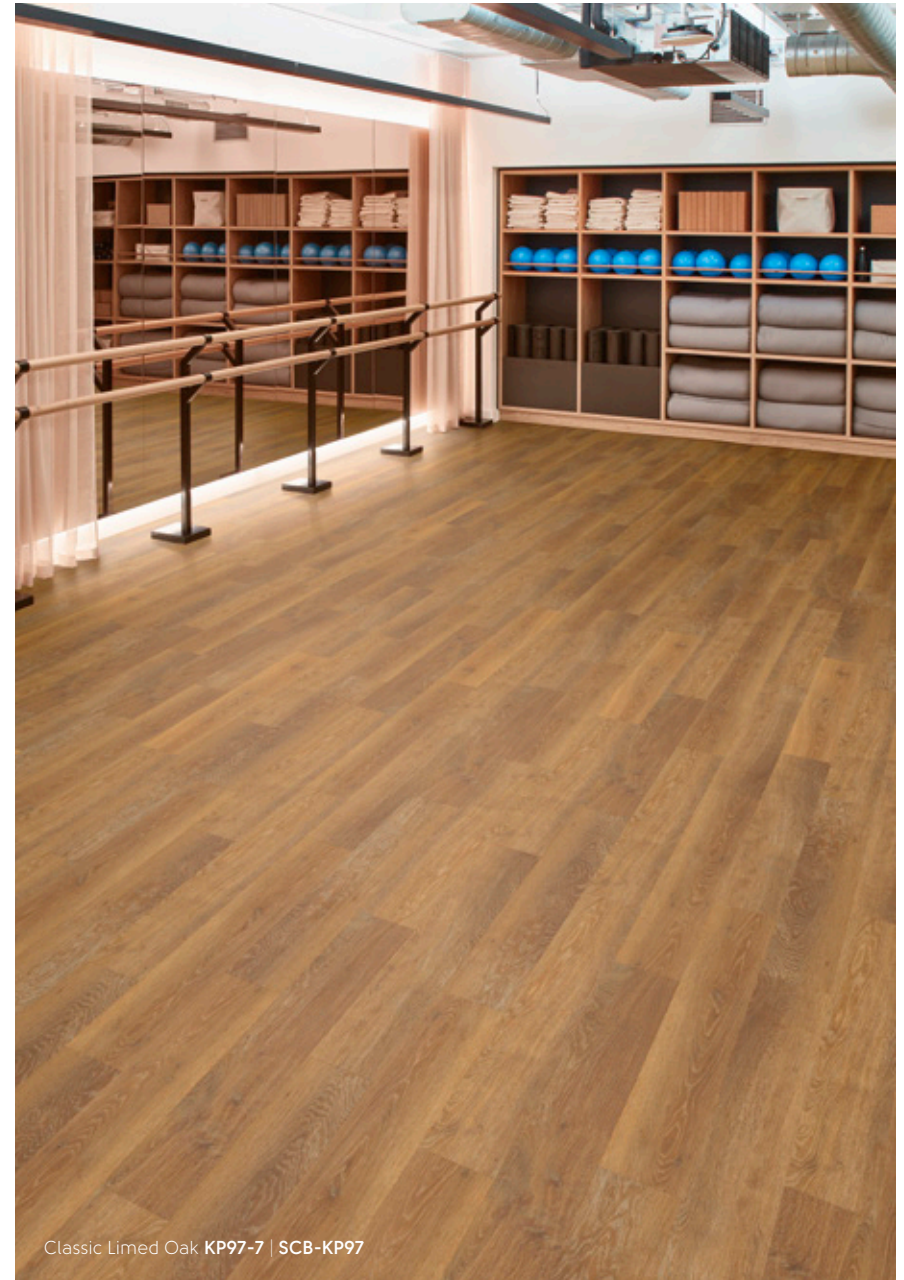

Classic Limed Oak KP97-7 | SCB-KP97



Rose Washed Oak KP95

Case Study Accor Hotel Bergamo - Poland



Aged Oak KP98-7

 **Gluedown:** 1219,2mm x 177,8mm



Dutch Limed Oak
KP154-7 




Washed Character Oak
KP144-7 




Traditional Character Oak
KP146-7 



Honey Limed Oak
KP155-7 

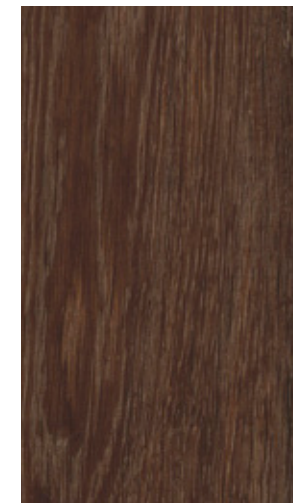

Aged Oak
KP98-7 



Mid Limed Oak SCB-KP96



Washed Character Oak KP144-7




Pale Lined Oak KP94-7 | SCB-KP94



Traditional Character Oak KPI46-7



Lime Washed Oak KP99-7 | SCB-KP99

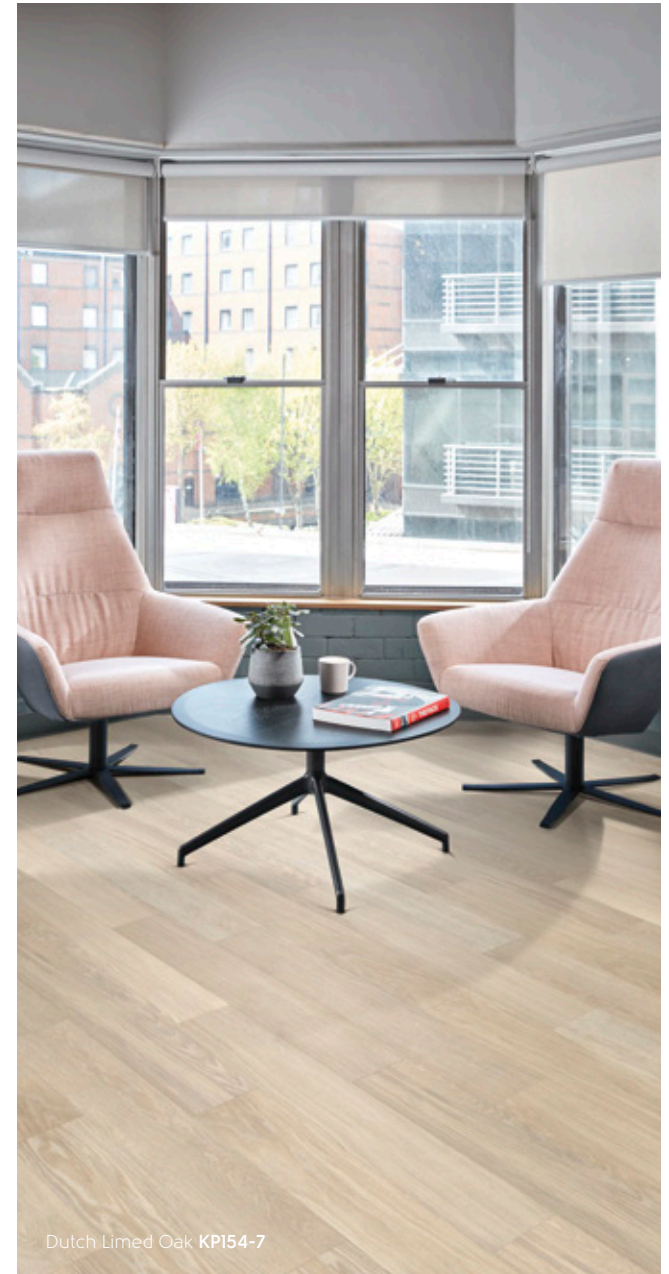

Dutch Lined Oak KPI54-7



Rose Washed Oak KP95-7 | SCB-KP95


Floorstyle Designer

Visualise our wide range of floors in any space using our Floorstyle visualiser tool.







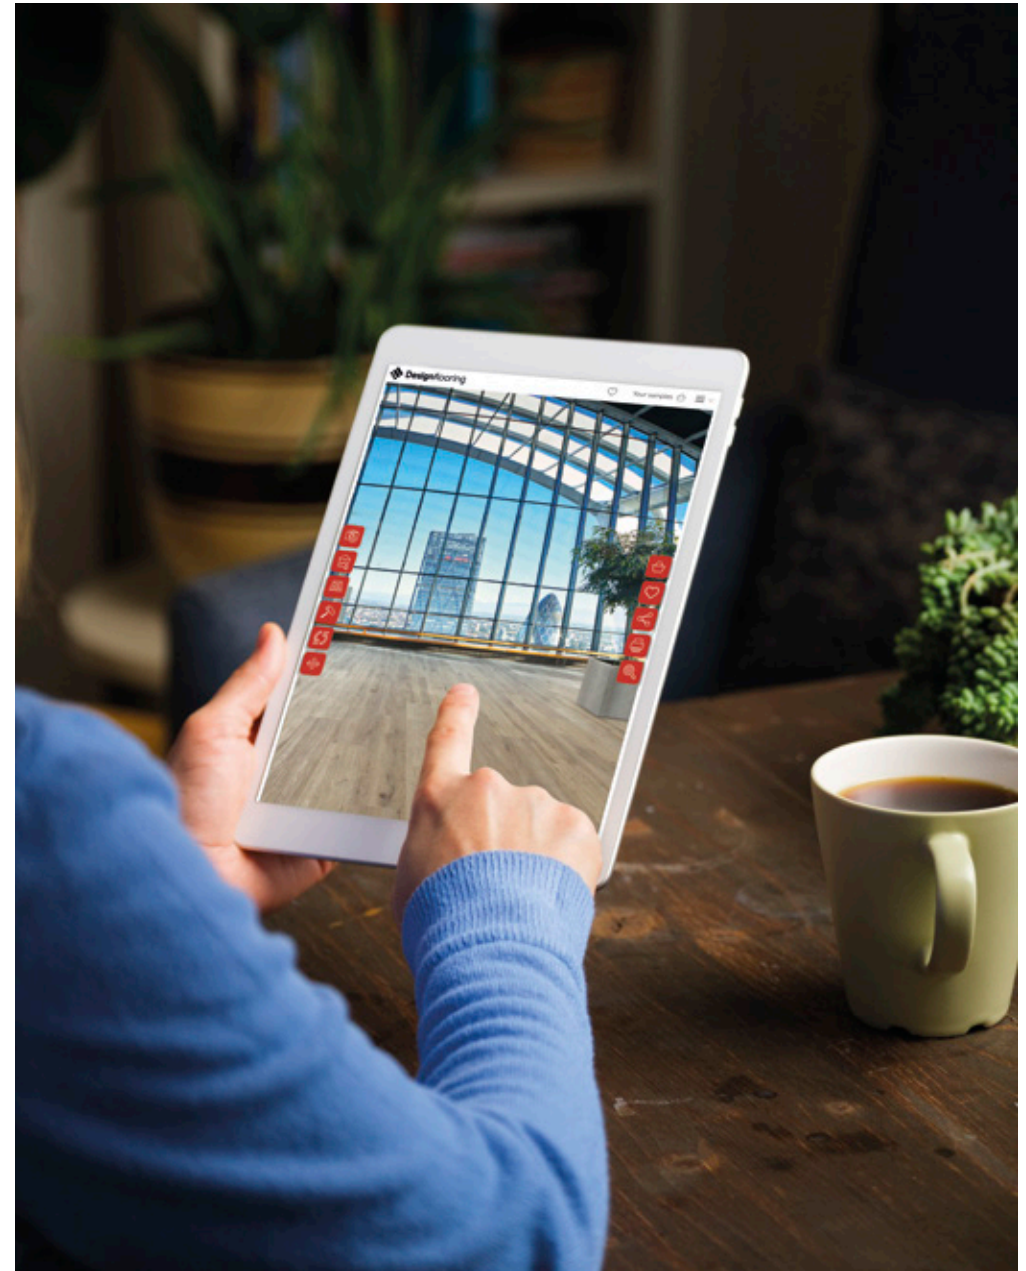













designflooring.com/floorstyle



Scan this QR code to try it out for yourselves.





Technical specification

	Standard	Gluedown result	Rigid core result
 Size	EN ISO 24342	1219,2 x 177,8 mm	1220,0 x 180,0 mm
 Thickness	EN ISO 24346	2,0 mm	4,5 mm
 Wear layer	EN ISO 24340	0,3 mm	0,3 mm
Locking mechanism		N/A	2G™ angling installation system ²
Surface treatment		K-Guard+® PU coating	K-Guard+® PU coating
Guarantee ¹	Commercial Residential	10 years 30 years	10 years 30 years
 Bevelled edge		No	No
 Mass per unit area	EN ISO 23997	3605 g/m ²	7784 g/m ²
 Standards	EN 649/EN ISO 10582 EN 16511	Heterogeneous PVC -	- Pass (Multilayer modular floorcovering panels)
 Classification	EN 685 / EN ISO 10874: Commercial Domestic	31: Commercial moderate 23: Domestic heavy	31: Commercial moderate 23: Domestic heavy
 Reaction to fire	EN 13501-1	B _{fl} -s1	B _{fl} -s1
 Staining resistance	EN ISO 26987 / EN 423	Excellent	Pass (Grade 5)
 Light fastness	EN ISO 105-B02	Pass (≥ 6)	Pass (≥ 6)
 Abrasion resistance	EN 660-2 EN ISO 10582 EN 13329 Annex E	Group T Type 1 -	- - Pass (> 10000 cycles)
 Furniture chair leg	EN 424	N/A	Pass (No visible damage)
 Flexibility	EN ISO 24344	Pass	N/A
 Dimensional stability	EN 434 / EN ISO 23999	Pass (≤ 0,25%)	Pass (< 0,25%)
 Acoustic impact noise reduction	EN ISO 717-2 / EN ISO 140-8 EN ISO 10140-1:2016	ΔL _w = 1 dB -	- ΔL _w = 19 dB
 Electrical behaviour body voltage	EN 1815	Pass	N/A
 Indentation - residual	EN 433/EN ISO 24343-1	Pass (≤ 0,1 mm)	Pass (≤ 0,1 mm)
 Castor chair continuous use	EN 425/ISO 4918	Pass	Pass (10,000 cycles)
 Thermal resistance	ISO 8302	0,0084 m ² K/W Suitable for underfloor heating Max 27°C	0,0184 m ² K/W Suitable for underfloor heating Max 27°C
 Slip resistance ²	EN 13893 DIN 51130	DS R10	DS R10



Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions)





¹ Subject to terms. Please see our website.
² Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.


IT'S A NEW DAY


AND WE'RE COMMITTED
TO CREATING A BETTER
TOMORROW.


Designflooring Evolve® is not only about
the planet, but it's about the people too.


 Manufactured in ISO 9001 certified
facilities for guaranteed quality

 Accredited by Sedex for ethical and
sustainable manufacturing

 Independently verified Environmental
Product Declarations (EPDs)

 Up to 50% recycled material
in the backing layer

 Designed for durability to extend
the lifecycle of your materials

 Eurofins Indoor Air Comfort (Gold) certified



To access this information
in French, German,
Polish or Dutch simply
scan the QR code.



For more information on how
Designflooring can support
you, contact:

+49 (0)211 469 592 03
sales@designflooring.com



designflooring.com