

LOOSE LAY



42: Light industrial general



33: Commercial heavy



23: Domestic heavy



4,5mm

Designflooring LooseLay

0,55 collection

Designflooring
LooseLay

LOOSE LAY



Field Oak LLP356



Designflooring LooseLay's K-Wave® Friction Grip Backing

Why loose lay?



Quick and cost-effective to install



Acoustic qualities (13dB)



No expansion gap required



Easy access to underfloor panels




Install over a damp subfloor



Reduce disruption by installing on most hard subfloor

 **Loose lay:** 1500,0mm x 250,0mm




Pearl Oak
LLP306 



Pure Danish Oak
LLP357 




Field Oak
LLP356 



Champagne Oak
LLP310 



Cashmere Oak
LLP353 



Alpine Oak
LLP352 



Wheat Oak
LLP355 



Sterling Oak
LLP354 





Cashmere Oak LLP353

 **Loose lay:** 1500,0mm x 250,0mm



Lemon Spotted Gum
LLP317 




French Grey Oak
LLP308 




French Grey Oak LLP308



Providence LLP108

 **Loose lay:** 1050,0mm x 250,0mm

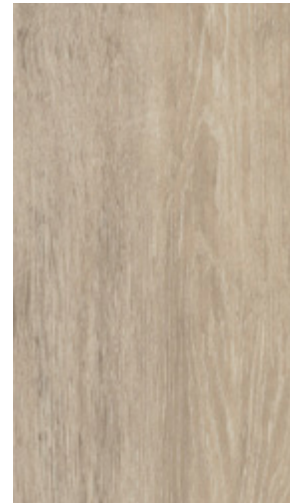

Lampione
LLP147 



Cambridge
LLP113 



Providence
LLP108 



Tavolara
LLP144 



Torcello
LLP145 



Stamford
LLP109 

 **Loose lay:** 1050,0mm x 250,0mm



Ashland
LLP95 



Country Oak
LLP92 




Budelli
LLP146 




Palmaria
LLP149 



Sicilia
LLP142 

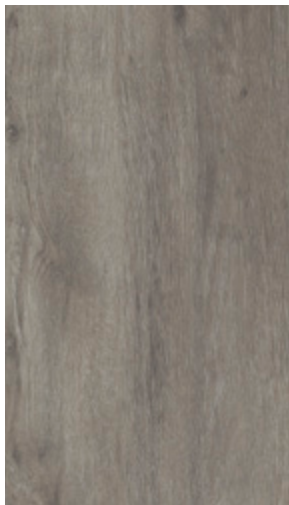

Linosa
LLP148 

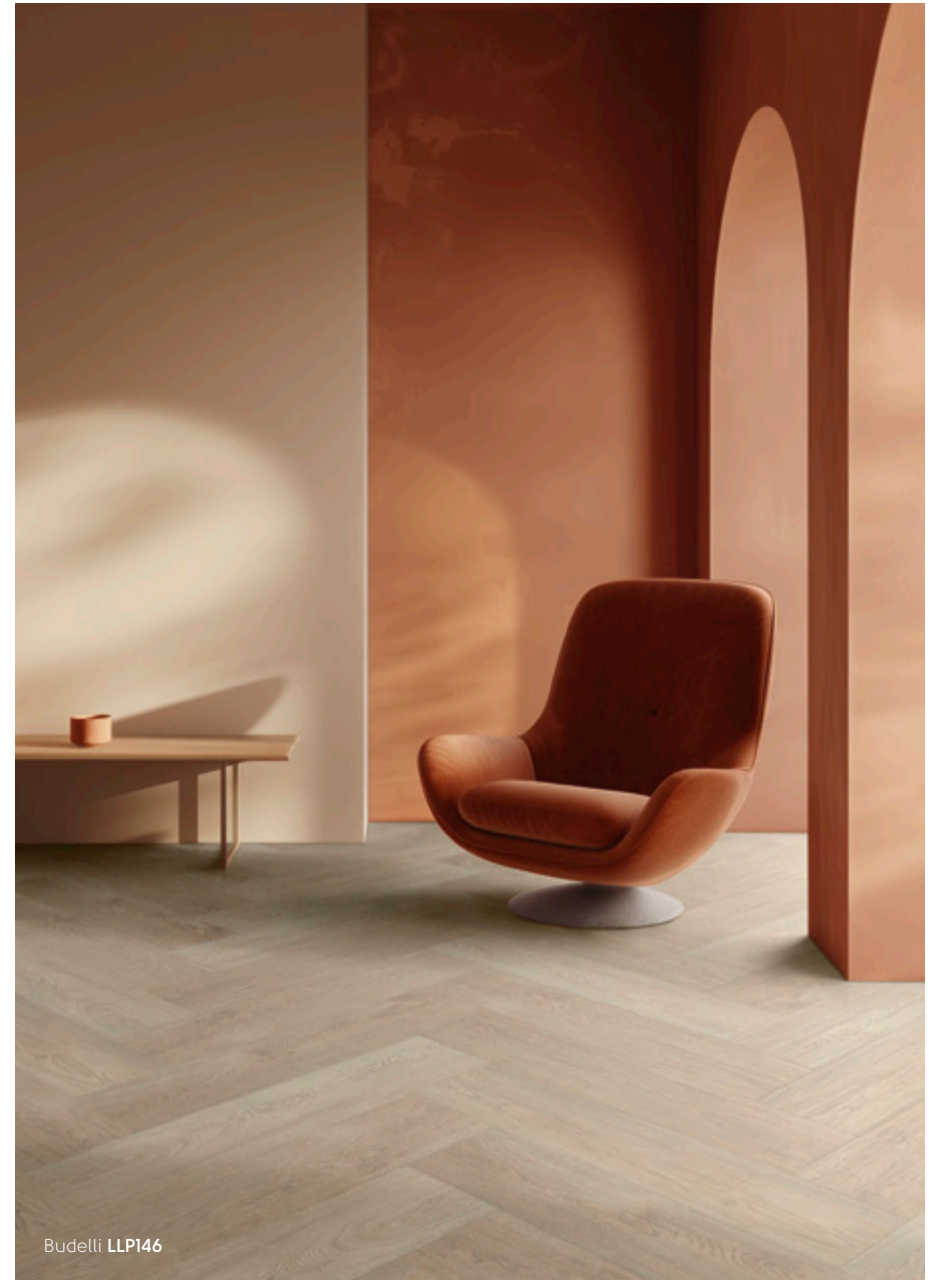

Budelli LLP146



Sicilia LLP142



 **Loose lay:** 500,0mm x 610,0mm



Capri
LLT209 



Quebec
LLT219 



Nisida
LLT210 

 **Loose lay:** 500,0mm x 610,0mm



Colorado
LLT201 



Madison
LLT203 



Madison LLT203



Colorado LLT201



Country Oak LLP92

Case Study IO Wellness Centre - France



Palmaria LLP149



Sterling Oak LPL354



Palmaria LPL149



Pure Danish Oak LLP357



Wheat Oak LLP355



Torcello LLP145



Country Oak LLP92

Case Study IO Wellness Centre - France



Capri LLT209


Floorstyle Designer

Visualise our wide range of floors in any space using our Floorstyle visualiser tool.








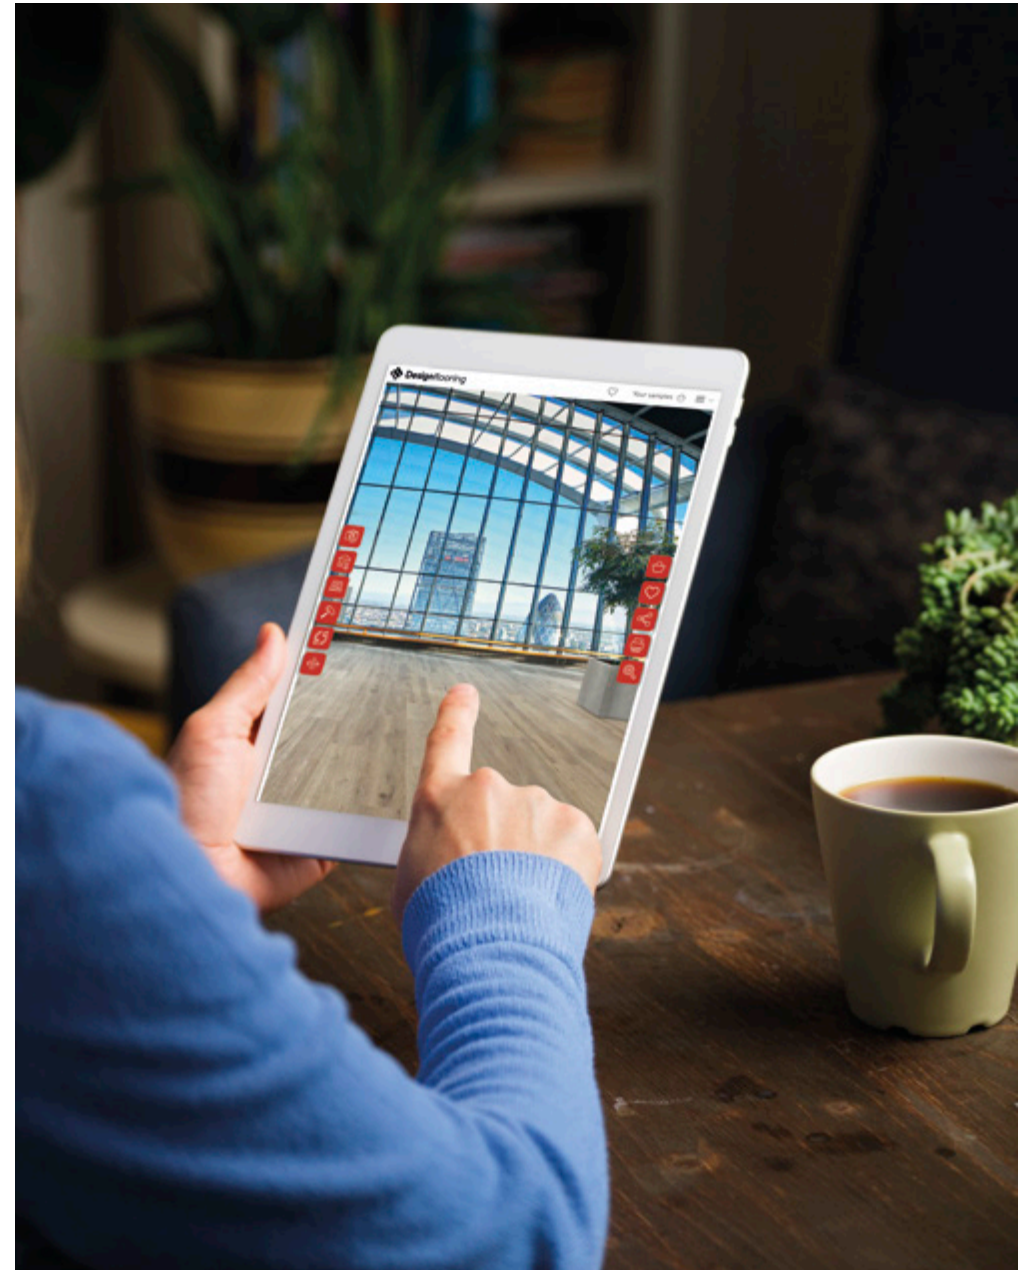









designflooring.com/floorstyle



Scan this QR code to try it out for yourselves.




Technical specification

	Standard	Loose lay result
 Size	EN ISO 24342	1500,0 x 250,0 mm 1050,0 x 250,0 mm 500,0 x 610,0 mm
 Thickness	EN ISO 24346	4,5 mm
 Wear layer	EN ISO 24340	0,55 mm
Surface treatment		K-Guard+® PU coating
Guarantee¹	Light industrial Commercial Residential	15 years 15 years 30 years
 Bevelled edge		No
 Mass per unit area	EN ISO 23997	7470 g/m ²
 Standards	EN 649/EN ISO 10582	Heterogeneous PVC
 Classification	EN 685 / EN ISO 10874: Light industrial Commercial Domestic	42: Light industrial general 33: Commercial heavy 23: Domestic heavy
 Reaction to fire	EN 13501-1	B _{fl} -s1
 Staining resistance	EN ISO 26987 / EN 423	Excellent
 Light fastness	EN ISO 105-B02	Pass (≥7)
 Abrasion resistance	EN 660-2 EN ISO 10582	Group T Type 1
 Flexibility	EN ISO 24344	Pass
 Dimensional stability	EN 434 / EN ISO 23999	Pass (≤ 0,10%)
 Acoustic impact noise reduction	EN ISO 717-2/EN ISO 140-8	ΔL _w = 13 dB
 Electrical behaviour body voltage	EN 1815	Pass
 Indentation - residual	EN 433/EN ISO 24343-1	Pass (≤ 0,1 mm)
 Castor chair continuous use	EN 425/ISO 4918	Pass
 Thermal resistance	ISO 8302	0,0245 m ² K/W Suitable for underfloor heating. Max 27°C
 Slip resistance²	EN 13893 DIN 51130	DS R10



Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).





¹ Subject to terms. Please see our website.
² Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.


IT'S A NEW DAY


AND WE'RE COMMITTED TO CREATING A BETTER TOMORROW.


Designflooring Evolve® is not only about the planet, but it's about the people too.

 Manufactured in ISO 9001 certified facilities for guaranteed quality

 Accredited by Sedex for ethical and sustainable manufacturing

 Independently verified Environmental Product Declarations (EPDs)

 Up to 50% recycled material in the backing layer

 Designed for durability to extend the lifecycle of your materials

 Eurofins Indoor Air Comfort (Gold) certified



To access this information in French, German, Polish or Dutch simply scan the QR code.



For more information on how
Designflooring can support
you, contact:

+49 (0)211 469 592 03
sales@designflooring.com



designflooring.com

